

# AHALTS ACCESS CONTROL SERIES

## Model – AHALTS TT01



- Valid passing duration settings: system will cancel the passing permission if a person does not pass through the lane within the valid passing duration.
- Fire alarm passing: when the fire alarm is triggered, the barrier will be dropped automatically for emergency evacuation.
- Bidirectional (entering/exiting) lane.
- Easy to configuration though PC web & Mobile web.
- Support speaker function by self-define voice file MP3 format.


## Specification

<b>System</b>	
Motor	/
MCBF	≥ 3 million times
<b>Network</b>	
Wired network	10/100 Mbps self-adaptive Ethernet
<b>Interface</b>	
Network interface	1
Lock control	2
Exit button	2
Alarm output	2
RS-485	4
RS-232	2
Wiegand	2
Fire alarm input	1
Case input	2
<b>Hardware</b>	
Access controller	Supplied
<b>Capacity</b>	
Card capacity	500,000
Event capacity	500,000
<b>Authentication</b>	
Card	YES
<b>Function</b>	
Configuration via PC Web	Support
Configuration via mobile Web	Support
Audio prompt	Support
Keypad configuration	Support
Communication protocol	ISAPI
<b>General</b>	
Throughput	30 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	550 mm (21.65")
Barrier material	1.2 mm stainless pipe
Pedestal material	stainless steel 1.5 mm
Power consumption	Standby: 20 W Working: 35 W Peak: 45 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)

# AHALTS ACCESS CONTROL SERIES


Working humidity	0% to 95% (No condensing)
Protective level	IPX4
Dimensions	410 mm × 1180 mm × 1350 mm (16.1" × 46.5" × 53.1")
Weight	41.78 kg (92.11 lb)With package: 51.45 kg(113.43lb)
Power supply method	Power supply: 100 to 120 VAC~ / 200 to 240 VAC~, 50/60 Hz,
Language	Arabic, Indonesian, Japanese, Kazakh, Portuguese (Brazil), Spanish (Mexico), Spanish (Spain), Thai, Russian, English
<b>Configuration</b>	
Module selection	NO
Application environment	Outdoor (waterproof)

## Dimension

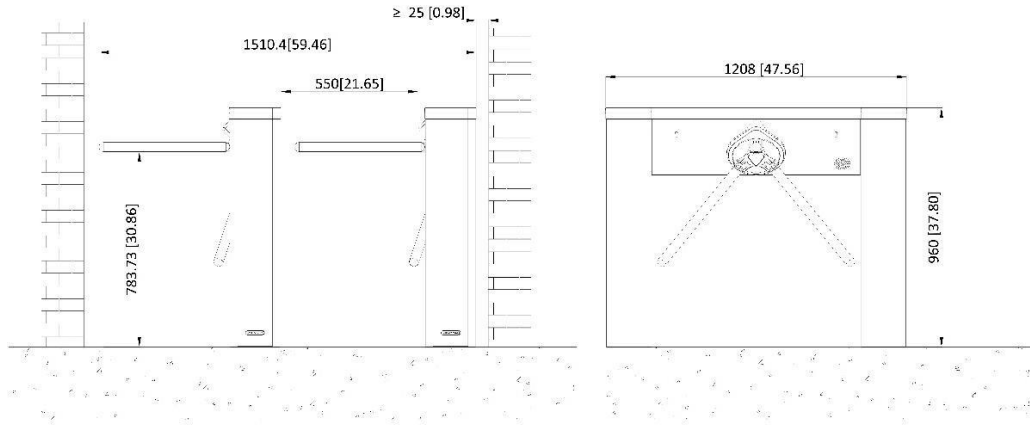

FRONT VIEW

SIDE VIEW

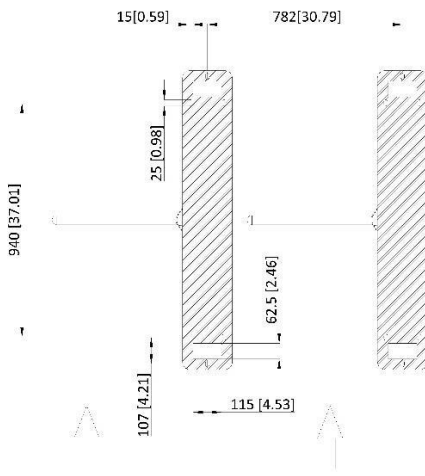

Entrance  
PLAN VIEW

Unit: mm [inch]  
SCALE 1:1